



Magnetostrictive Displacement Sensor


R Series Product manual



• High quality • High precision • Long service life

Company Profile


As a technological innovation enterprise born out of Zhejiang University, our company has more than 180 employees, including 4 overseas talents, 4 professors, and 2 associate professors. There are also 12 doctors, and more than 86% of employees with a bachelor degree or above.

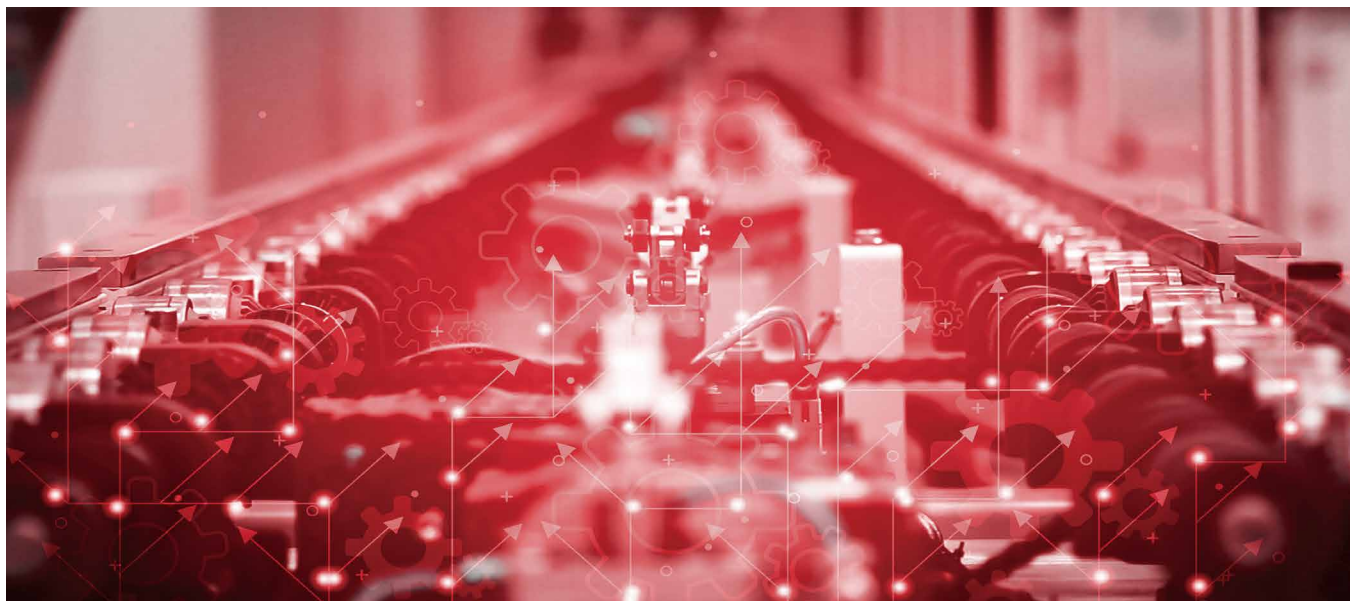

We are committed to intelligent manufacturing, high-end equipment, intelligent sensing, intelligent detection, military industry and other fields. Most of our company's products are independently researched and developed, and the market share ranks in the forefront of the domestic industry. A variety of equipment is the first set in China, which breaks the long-term monopoly of foreign companies.

We are a national high-tech enterprise integrating scientific research, product development, engineering design, and technical consulting. Besides, the company has obtained 45 invention patents, 29 utility model patents, 10 software copyrights, and 4 registered trademarks.

Taking "Created in China, Create China" as our ideal, we are committed to building a century-old national brand. Our development goal is to become a well-known leading technology and strength-based enterprise in China's high-end equipment and intelligent inspection industries.

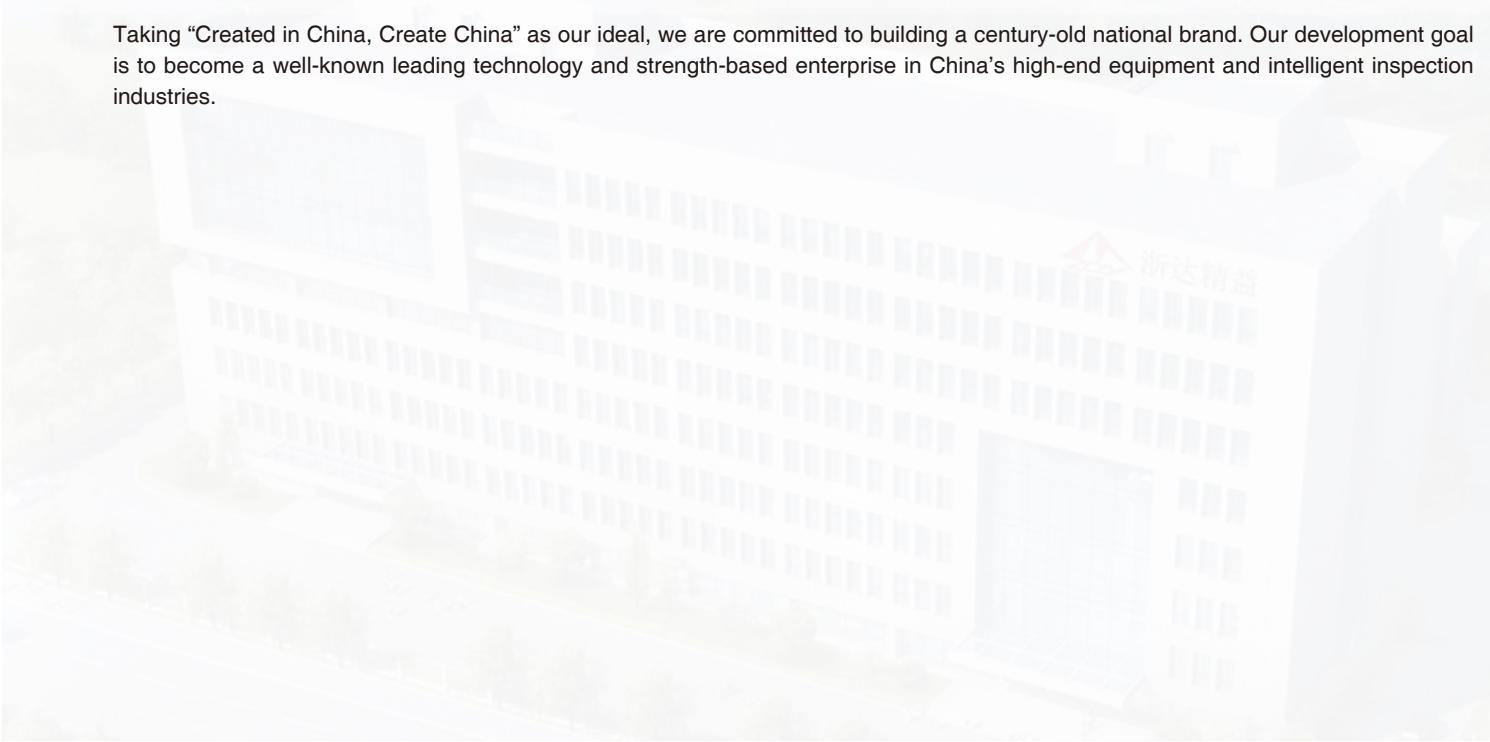

Honorary Qualification




RH/RP Displacement Sensor- CANBus Output



Technical Characteristics

- Rugged and fully enclosed design
- Non-wear, non-contact measurement method
- Linear measurement, absolute output
- High resolution, up to 1µm
- Easy diagnosis, LEDs real-time condition monitoring
- The repetition accuracy is 0.001% F.S
- Digital technology, stable and reliable
- CANopen signal output
- Support simultaneous measurement of multiple magnet ring positions

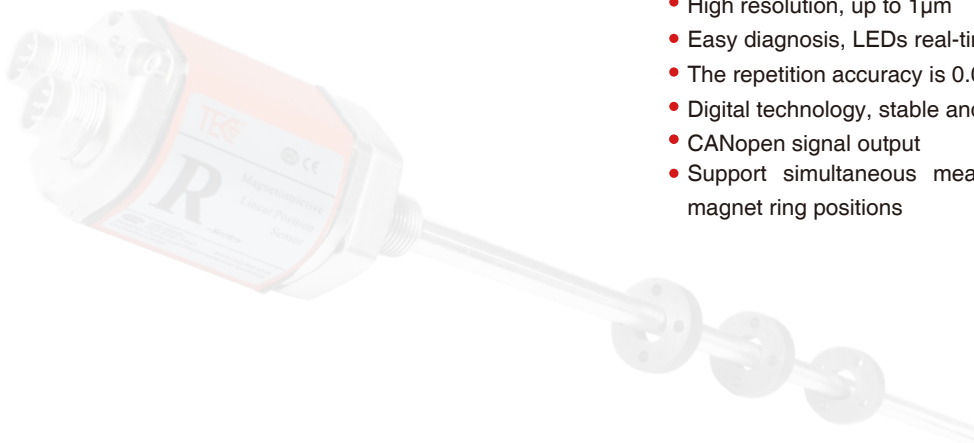

C Product Parameters-CAN Bus Output

• Input

Measurement data	Position magnet ring
Stroke length	25~5500 mm, customized according to customer needs
Number of measurements	1~9

• Output

Interface	CANBus System Protocol, ISO11898
CANopen	CIA Standard DS-301V3.0 Encoder Profile DS-406V3.1
Transmission speed	Maximum 1Mbit/s
Resolution	1 / 2 / 5 / 10 / 20 / 50 / 100 μ m
Nonlinearity	< 0.01% full-scale taxi, minimum 50 μ m
Repetition accuracy	< $\pm$ 0.001% of full scale, minimum $\pm$ 1 μ m
Update time	1KHz (range $\leq$ 1m) 500Hz (1m< range $\leq$ 2m) 250Hz (2m< range $\leq$ 3m) , customizable
Hysteresis	<10 μ m
Temperature coefficient	<15ppm/ $^{\circ}$ C

• Operating conditions

Magnet velocity	Arbitrary
Protection level	IP67RH Stainless Stell Rod/IP65RP Aluminum profile
Operating temperature	-40 $^{\circ}$ C ~ +85 $^{\circ}$ C
Humidity/dew point	Humidity 90%, no condensation
Shock index	GB/T2423.5 100g(6ms)
Vibration index	GB/T2423.10 20g/10~2000Hz
EMC Test	GB/T17626.2/3/4/6/8 , Grade4/3/4/3/3 , Class A, CE Certification

• Structure and Material


Failure indication		Electronic bin coverwith LEDs display
RH Series	Electronic bin	Aluminum alloy
	Measuring rod	304 stainless steel
	Outer tube pressure	35MPa (continuous)/70MPa (peak) or 350bar (continuous)/700bar (peak)
	Position magnet	Standard magnet ring and various ring magnets
RP Series	Electronic bin	Aluminum alloy
	Measuring rod	Aluminum alloy
	Position magnet	Slider magnet, square magnet, sector magnet
Mounting thread form		M18×1.5、 M20×1.5、 3/4"-16UNF-3A (customizable)
Installation direction		Any direction
Outgoing mode		Cable outlet or Connector

• Electrical Connection

Input voltage	+24Vdc $\pm$ 20%
operating current	<80mA (varying with range)
Polarity protection	Max.-30Vdc
Overvoltage protection	Max.36Vdc
Insulation resistance	>10M Ω
Insulation strength	500V

SS Output Characteristics-CAN Bus Output


- Connect by 6-pinconnector (series connection)

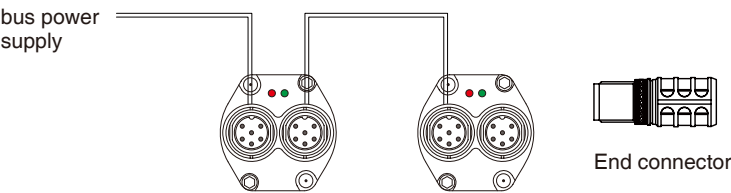

LU LED Real-time State Monitoring and Diagnosis

- As a slave station, CAN output magnetostrictive displacement sensor can upload the displacement information and velocity information of the vernier magnet to the controller in real time through bus. It conforms to CAN (ISO 11898) protocol standard, and the maximum transmission rate is 1Mbit/s.
- The integrated LEDs (red or green) provide the basic status feedback and troubleshooting function of the sensor.

Green light	ON	ON	ON	Flash
Red light	OFF	Flash	ON	ON
Function	Normal work	The magnet leaves the Stroke length range	Magnet not detected	Programming state







A a Installation Instructions-CAN Bus Output

- Dimensions and installation guidance of RH pressure-resistant rod sensor

RH series pressure-resistant rodshell, built-in installation design for hydraulic system, pressure-resistant 35MPa continuous, flexible and simple installation mode, mounting thread form M18×1.5 or M20×1.5 or 3/4"-16UNF-3A.

Note: The measurement Non-usable area shown in the figure indicates that the output value of the sensor in this area is zero or unreliable. The values of the head and end non-usable areas of this product are 50.8mm and 63.5mm respectively. The value of the measurement non-usable area can be appropriately modified according to the needs of customers, please pointed out when ordering.

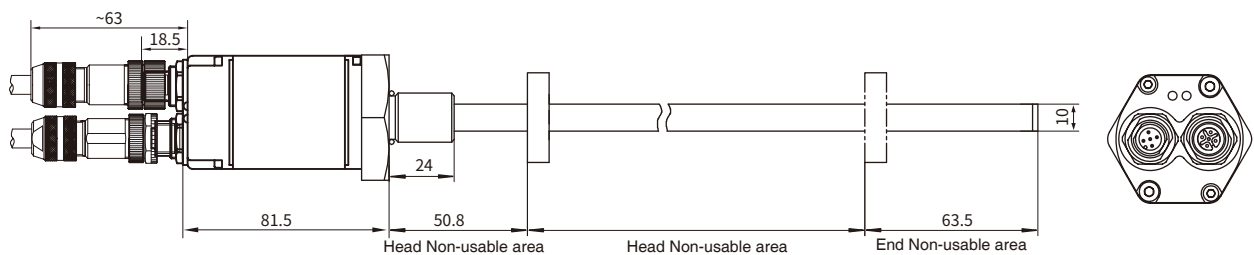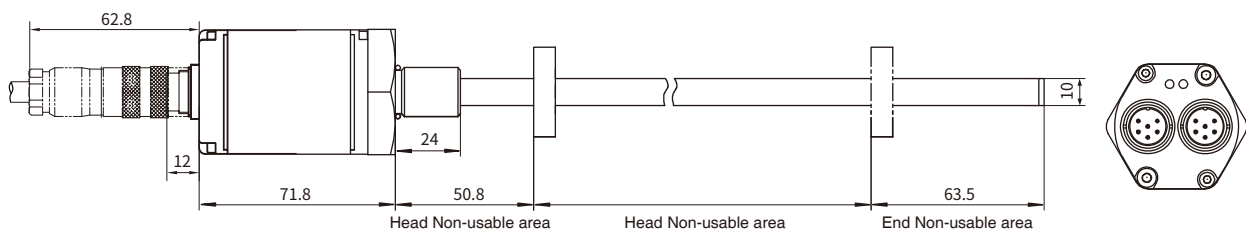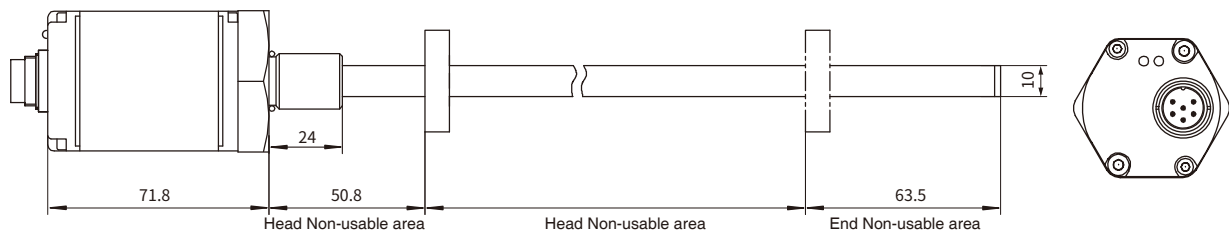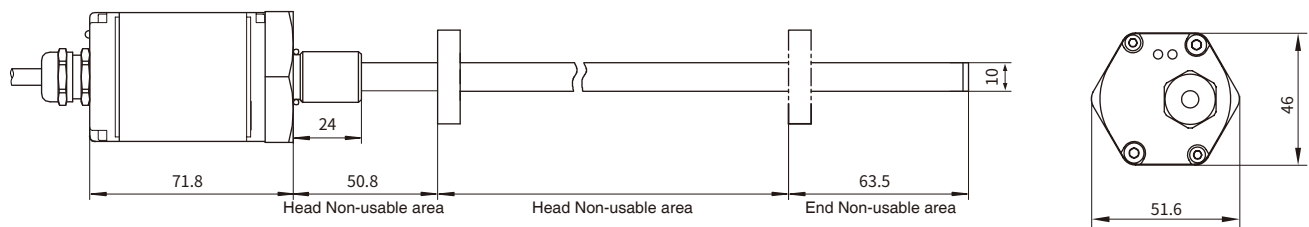


A a Installation Instructions-CAN Bus Output

- Dimensions and installation guidance of RP aluminum profile sensor

RP Series aluminum profile provides flexible and simple external installation mode, which is suitable for stroke or position detection of linear motion mechanism, and can also be used for external position detection of hydraulic cylinder.

Note: The measurement Non-usable area shown in the figure indicates that the output value of the sensor in this area is zero or unreliable. The default value of the measurement Non-usable area at the head and end of this product is 28mm and 66mm respectively. The value of the measurement Non-usable area can be modified appropriately according to the customer's needs, please pointed out when ordering.

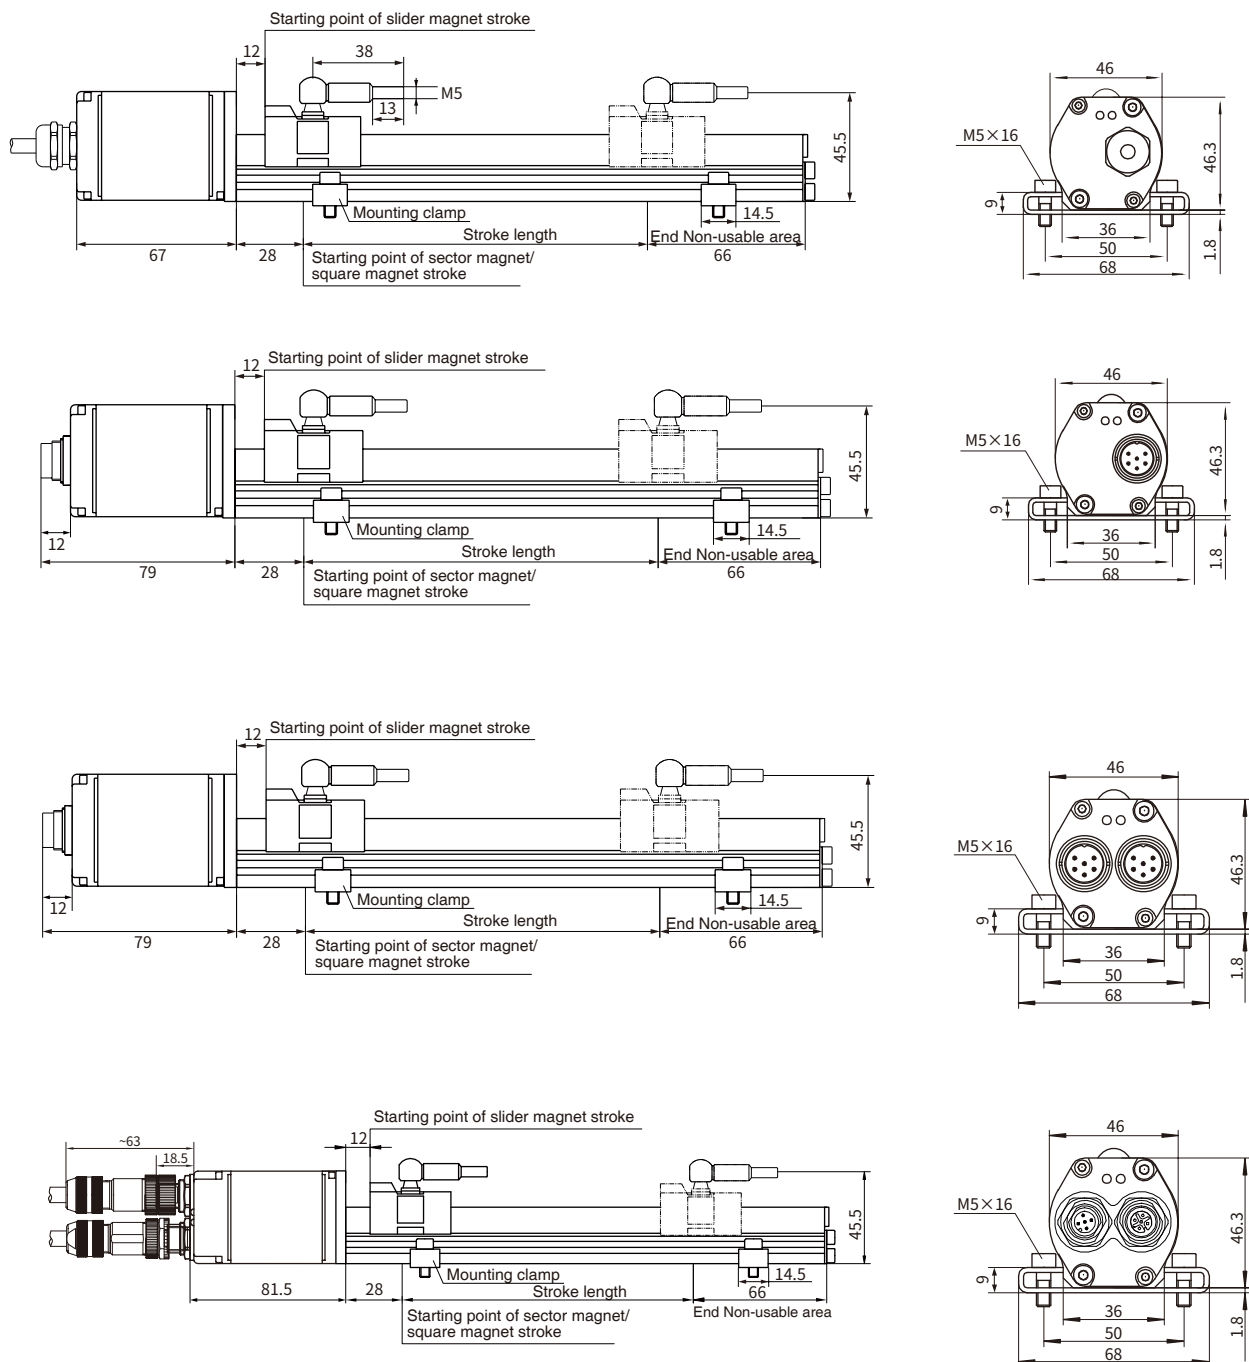


C Common Accessories - CAN Bus Output

Accessory name/ model	Dimensions	Accessory name/ model	Dimensions	Accessory name/ model	Dimensions
Standard Magnet ring Order No.: 211501		Magnetic isolation gasket		6-pin female connector Order No.: 312701	
Sector magnet Order No.: 211502		Sector magnetic isolation gasket		6-pin end female connector Order No.: 312722	
Slider magnet Order No.: 211503		Square magnet Order No.: 211508			

Note: Please refer to "Magnet ring Selection" for details of magnet ring kit and other models.

• Wiring mode

When the sensor is connector output, refer to the pin definition in the following table for wiring mode; when the sensor is cable outlet output, refer to the line color definition in the following table for connection mode




• 5-pin male connector and female connector pin arrangement (facing the sensor head direction)

Pin	Line color	Pin/wire function definition
1	-	Do not connect
2	Brown	+24 Vdc power supply (-20%~+20%)
3	White	0Vdc (power supply loop)
4	Yellow	CAN (+)
5	Green	CAN (-)



• 6-pin male connector arrangement (facing the sensor head)

Pin	Line color	Pin/wire function definition
1	Green	CAN (-)
2	Yellow	CAN (+)
3	-	Do not connect
4	-	Do not connect
5	Brown	+24Vdc power supply (-20%~+20%)
6	White	0 Vdc (power supply loop)



4-pin connector socket (for power supply)

• 4-pin male connector pin arrangement (facing the sensor head direction)

Pin	Line color	Pin/wire function definition
1	Brown	+24Vdc power supply (-20%+20%)
2	White	Do not connect
3	Blue	0Vdc(power supply circuit)
4	Black	Do not connect

X Selection Guide-CAN Bus Output

R		-	M					-					-	C					-				
01	02		03	04	05	06	07		08	09		10	11	12	13		14	15	16	17	18	19	20

01 - 02		Sensor shell form
R	H	Pressure-resistant rod (internal or external)
R	P	Aluminum profile (external only)

03 - 07		Measuring range
		Four digits, less than four digits are preceded by zero, M means metric system, unitmm

08 - 09		Magnet ring type/mounting thread form
Only for RH series	S 1	M 18×1.5, measuring rod diameter 10mm, 304 material
	S 2	M20×1.5, measuring rod diameter 10mm, 304 material
	S 3	3/4 "-16UNF-3A, measuring rod diameter 10mm, 304 material
Only for RP Series	C 1	Sector magnet
	C 2	Slider magnet
	C 3	Square magnet

10 - 13		Connection form
---------	--	-----------------

10 - 11		Cable outlet mode
D	A	Single cable outlet, PUR sheath, cyan,-20~80C, end scattered

12 - 13		Cable outlet mode: cable length, 0199 meters
0	D R 1	PVC sheath, length 150mm, end 5 pin male connector

10 - 13		Connector mode
P	D 6 0	6-pin male connector (M16)
P	D 6 2	Two sets of 6-pin male connectors (M16)
P	D 5 0	5-pin male connector (M12)
P	D 5 2	5-pin male connector (M12) and 5-pin female connector (M12)
P	D 5 4	5-pin male connectors (M12), 5-pin female connectors (M12), 4-pin male connectors (M8)

Note: For supporting cables, please refer to CAN bus cable accessories selection

14 - 18		Signal output mode
14		Interface
C		CAN bus

15		Protocol type
1	CANopen	2 CANBasic

16		Baud
1	1000kBit/s	2 800kBit/s
3	500kBit/s	4 250kBit/s
5	125kBit/s	6 100kBit/s
7	50kBit/s	8 20kBit/s

17		Resolution
1	0.1mm	2 0.05mm
3	0.02mm	4 0.01mm
5	0.005mm	6 0.002mm
7	0.001mm	

18		Number of magnet rings (1~9 optional)
----	--	---------------------------------------

19 - 20		Non-usable area at head and end, customizable
S	0	50.8mm+63.5mm
B	0	30mm+60mm
S	1	28mm+66mm (used in RP series)

- Note: The forward output of the sensor means that when the magnet ring moves away from the electronic bin, the output value increases and decreases when the magnet ring moves in the reverse direction.

- Selection example: RH-M0300-S1-PD60-C1171-S0

Indicates: The ordered product model is RH structure displacement sensor, the measuring range is 300mm, the mounting thread form is M18×1.5 (metric system), the measuring rod diameter is 10mm, the material is 304, One set of 6-pin male connector, the baud is 1000kbit/s, the resolution is 0.001mm, single magnet ring, the Non-usable area at the head is 50.8mm, and the Non-usable area at the end is 63.5mm.

C Selection of CAN Bus Cable Accessories

C	A	N	-	M				-			
01	02	03		04	05	06	07		08	09	10

01 - 03			Type
C	A	N	CAN bus
04 - 07			Cable length
M	*	*	Less than 3 digits are preceded by zeros, and M means metric system, unit m
08 - 10			Cable type, outlet mode
08			Cable type
C			PVC sheath, purple, 4 cores,-40~75C
09 - 10			Connection
0	1		One end of 6-pin (M16) female connector, and one end scattered
0	2		One end of 5-pin (M12) female connector, and one end scattered
0	3		One end of 5-pin (M12) male connector, and one end scattered
0	4		One end of 5-pin (M12) right angle female connector, and one end scattered
0	5		One end of 6-pin (M16) right angle female connector, and one end scattered
1	1		6-pin (M16) female connector at both ends
2	3		One end 5-pin (M12) female connector and one end 5-pin (M12) male connector

- Selection example: CAN-M015-C01

Indicates: CAN bus interface cable, 15m long, PVC sheath, purple, 4-pin,-40~75C, 6-pin (M16) at one end of the cable are female connector, and one end scattered.

- Selection example: CAN-M020-C23

Indicates: CAN bus interface cable, 20 meters long, PVC sheath, purple, 4 cores,-40~75C, with 5-pin (M12) at one end female connector and 5-pin (M12) at the other end male connector.

